


INSTALLATION MANUAL

Counterbalance Monitor Arm

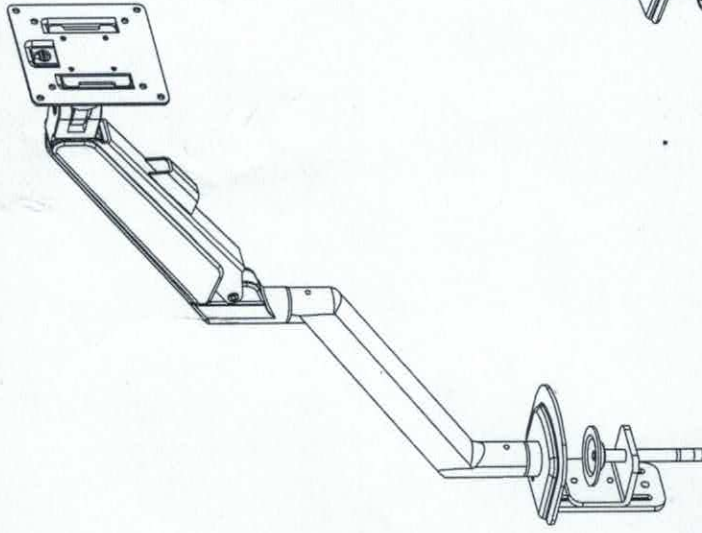

32"
MAX

75x75/100x100




2-9KG
(4.4-19.8lbs)
EACH

CAUTION:

A Use with products heavier than the rated weights indicated may result in instability causing possible injury.

- Mounts must be attached as specified in assembly instructions. Improper installation may result in damage or serious personal injury.
- Safety gear and proper tools must be used. This product should only be installed by professionals.
- Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
- Use the mounting screws provided and **DO NOT OVER TIGHTEN** mounting screws.
- This product contains small items that could be a choking hazard if swallowed. Keep these items away from children.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.

PRODUCT LINE GRAPH

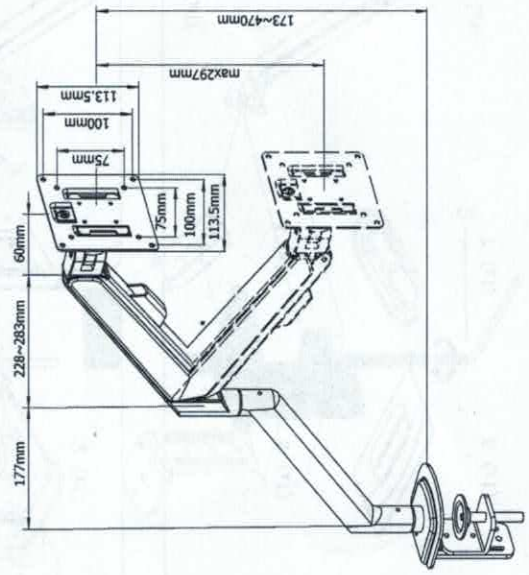


Parts


Hardware



Tools required




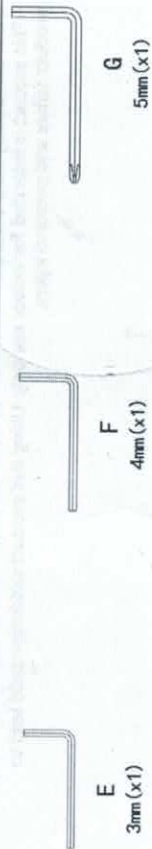


Components


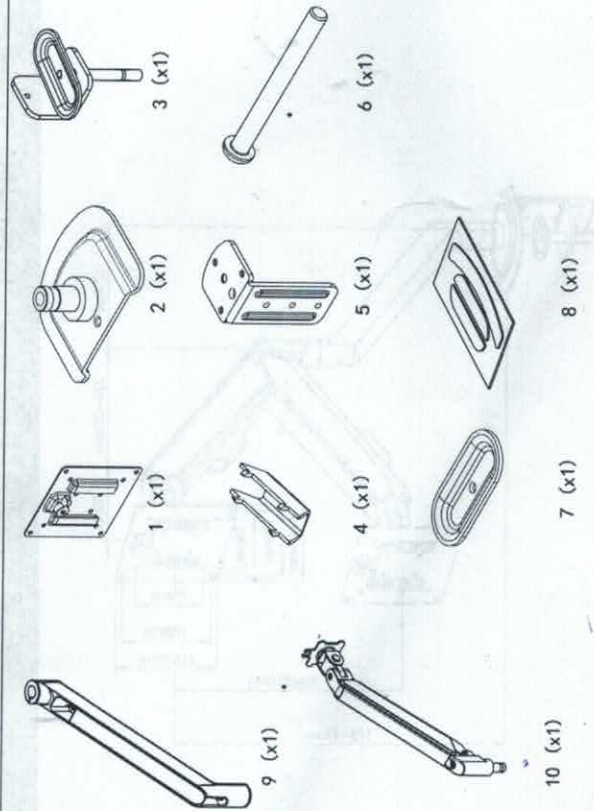


STEP 1 Choose a mounting option


OPTION A: Clamp Installation

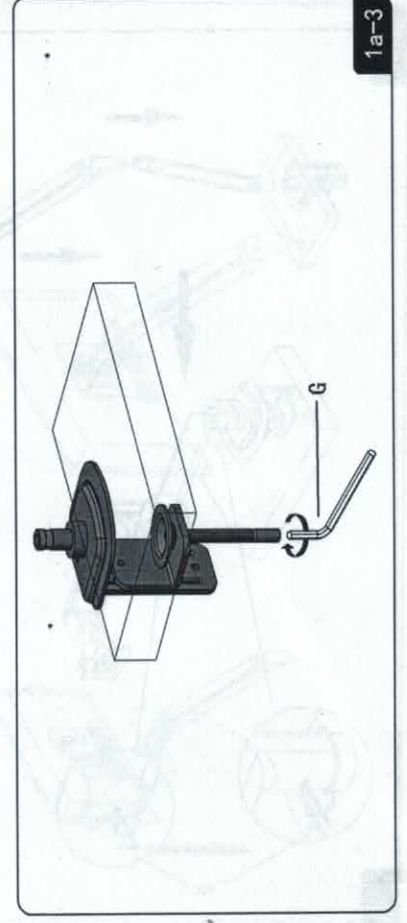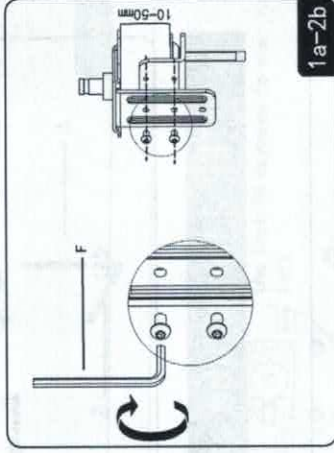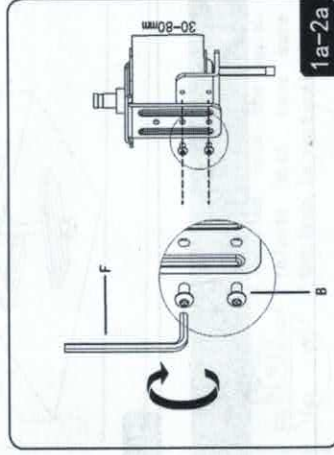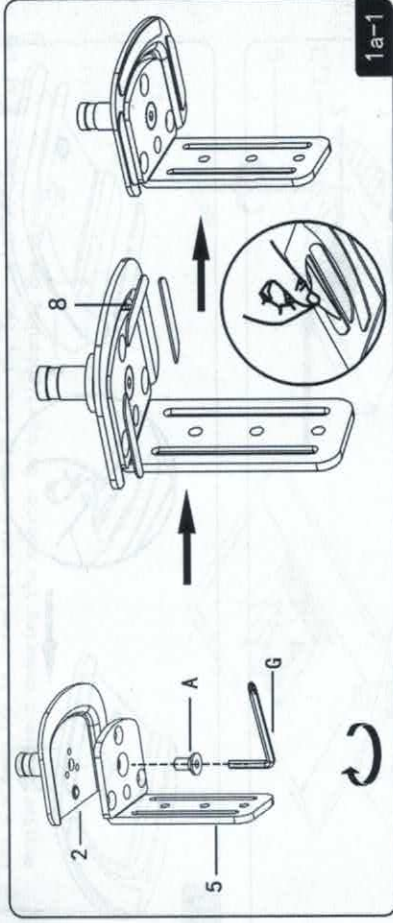



OPTION B: Existing Grommet Hole Installation

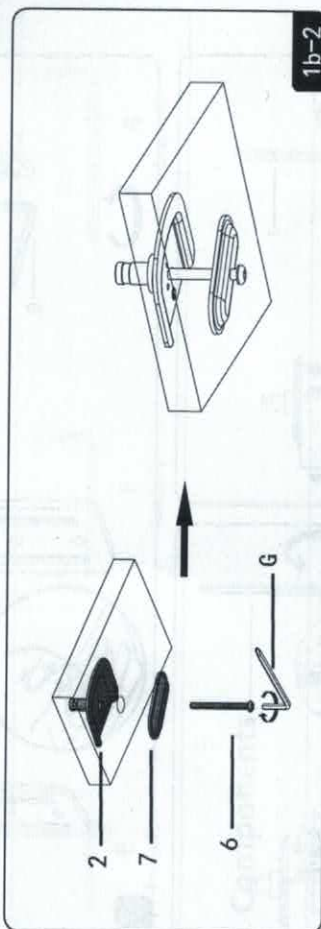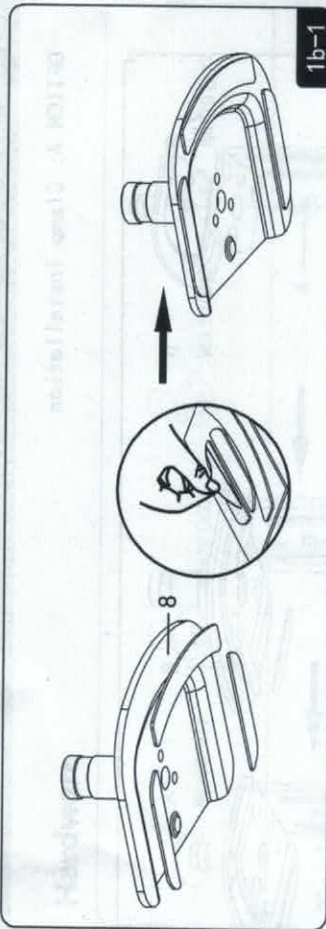

STEP 2 Install the arms

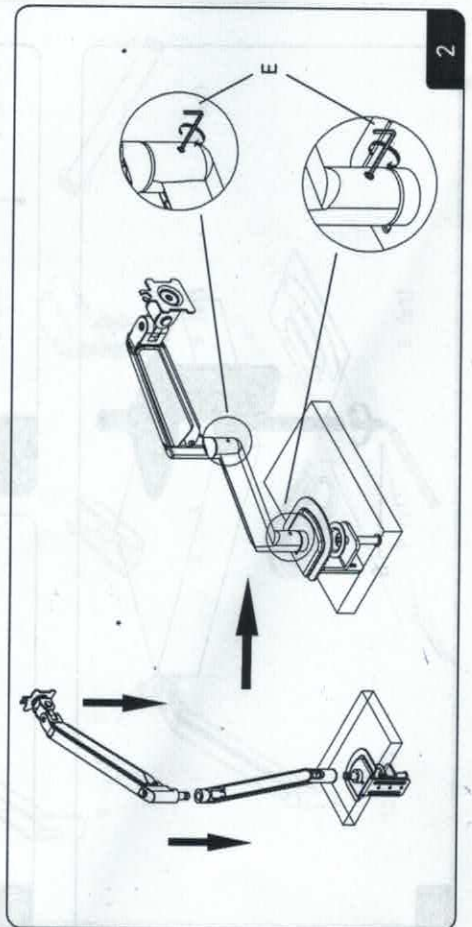


STEP 3 Connect with monitor

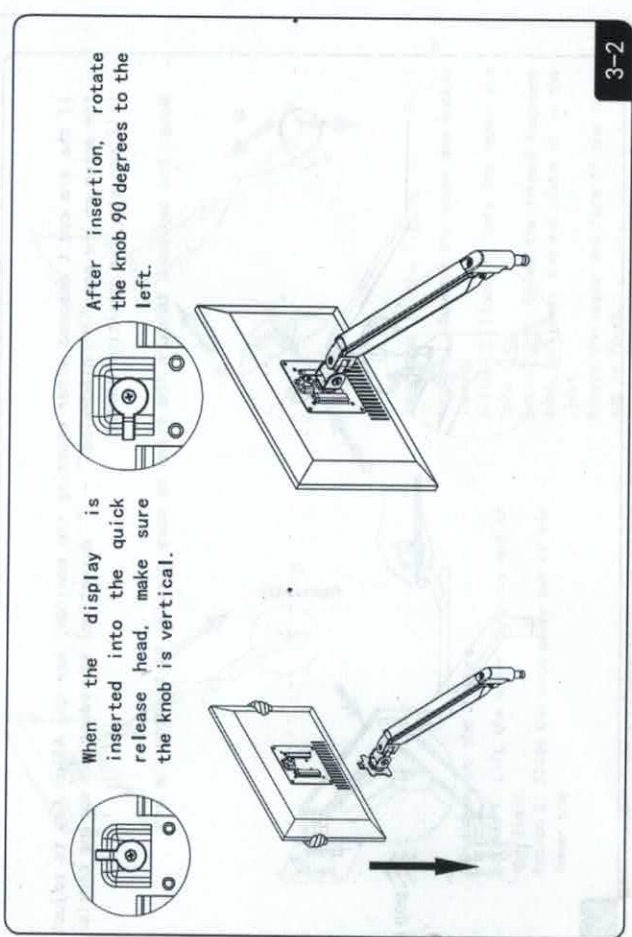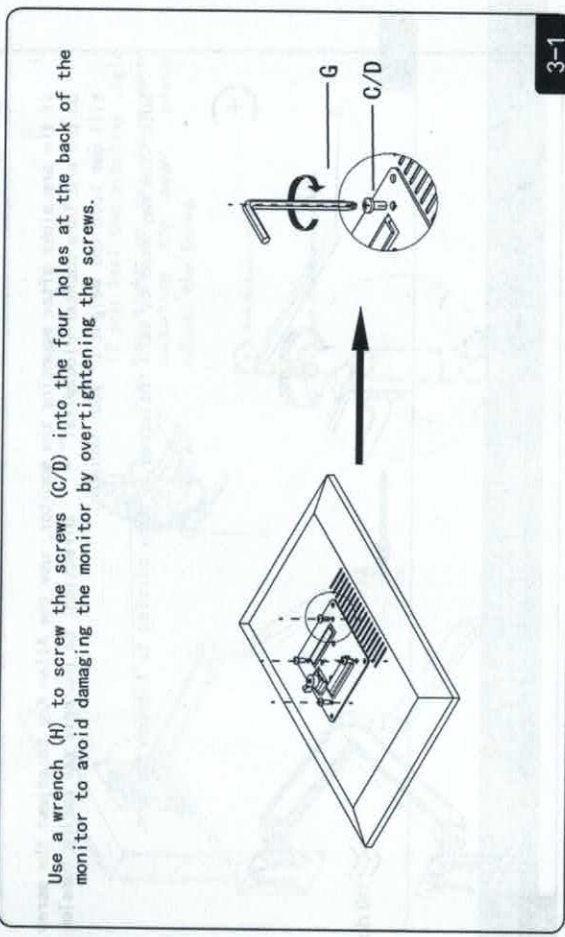

STEP 4 Tension adjustment

If the arm sinks after mounting the monitor, use the Allen Key to adjust the screw on the arm. Turn counter-clockwise (" - " direction) to increase gas spring tension till can hold the weight of your monitor.


Note: You may need to turn the screw by many circles to tighten the arm.

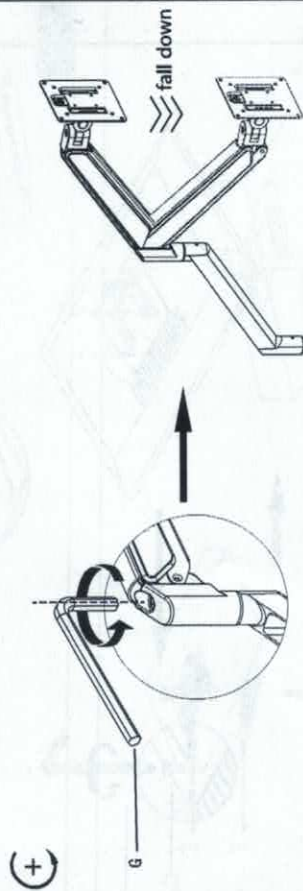

4-1


If the arm can't descend after mounting the monitor, use the Allen Key to adjust the screw on the arm. Turn clockwise (" + " direction) to reduce gas spring tension till can stay the position needed.

Note: You may need to turn the screw by many circles to tighten the arm.

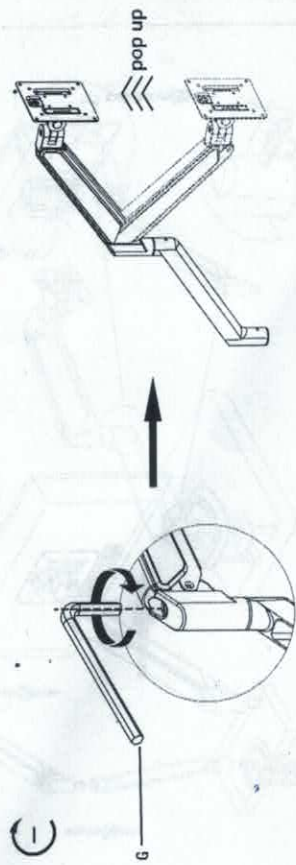

4-2

STEP 5 Leaning adjustment

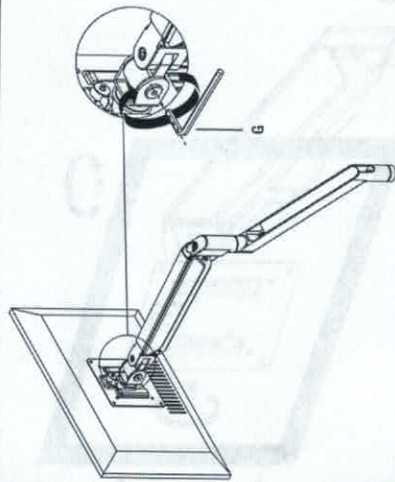


If you feel the pitching angle too tight or too loose when adjusting the mount, please adjust the Screw.

(+) Turn clockwise to tighten

(-) Turn counterclockwise to loose

5

STEP 6 Cable management

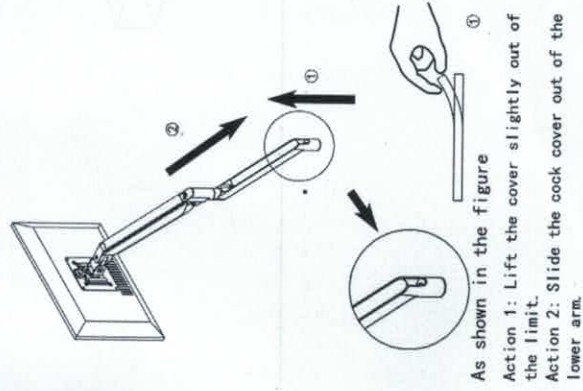

As shown in the figure

Action 1: Lift the cover slightly out of the limit.
Action 2: Slide the cock cover out of the lower arm.

As shown in the figure

Action 1: Squeeze the upper arm buckle inward.
Action 2: Place it into the upper arm hole site.
Action 3-4: Slide the thread fastener into the lower arm and place it in the limit.
Ensure the upper end face of the lower arm is flush.

6

Adjustable instruction

